



VoyagerPDF™ is a handheld bar code scanner capable of decoding all standard 1D, 2D (PDF417), RSS and composite symbologies.

MS9544 **VoyagerPDF™**

Sunrise 2005 Compliant

Features

- Decodes 1D & 2D (including RSS, PDF417 and PDF417 truncated) bar codes
- Automatic trigger operation
- Bright easy to see, easy to aim laser line
- CodeGate® data transmission technology ideal for menu scanning
- User-replaceable, single cable interface to host
- Adjustable stand with auto stand detect
- Hands free or hand held operation
- Firmware updates via Flash ROM
- Supports commonly used interfaces including USB
- Easy programming using Windows® software or bar codes
- OPOS and JPOS system compatible

Metrologic's VoyagerPDF is feature rich and offers the same outstanding performance found in all Voyager Series scanners. What differentiates the VoyagerPDF scanner is its added ability to decode 2-D codes such as PDF417, PDF417 truncated and RSS-14 composite (RSS-14 with a PDF417 element) bar code symbologies.

VoyagerPDF decodes PDF417 by sweeping the high-speed laser scan line up or down over the code gathering information from each line. Integrating a high performance processor with software designed to optimize PDF417 performance, Metrologic engineers have produced a product with exceptional scan performance. PDF codes are emerging in a variety of markets and in a multitude of applications. Many government

agencies are incorporating PDF codes on driver's licenses and automobile registration cards. These cards will assist retailers with age verification particularly helpful in preventing the sale of tobacco or alcohol products to underage persons. Other applications utilizing PDF codes include national identification cards, e-Stamps, pharmaceutical and customer loyalty cards.

For decoding linear codes Metrologic's patented auto trigger and CodeGate button features are used. Simply aim the laser line on the selected bar code, click the CodeGate button, and the data is transferred to the host. In addition, VoyagerPDF has built-in Flash ROM providing a fast, easy-to-use method for updating your bar code scanner with the latest features.



MS9544 VoyagerPDF™

OPERATIONAL

Light Source	Visible Laser Diode 650 nm $\pm$ 10 nm
Laser Power	0.96 mW (peak)
Depth of Scan Field (programmable)	0 mm - 203 mm (0" - 8") for 0.33 mm (13 mil) bar codes
Width of Scan Field	64 mm (2.5") @ face; 249 mm (9.8") @ 203 mm (8.0")
Scan Speed	210 $\pm$ 10 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.127 mm (5.0 mil)
Decode Capability	Autodiscriminates all standard 1-D bar codes, RSS-14, PDF417 and truncated PDF417; for other symbologies call Metrologic
System Interfaces	PC Keyboard Wedge, RS232, OCIA, Light Pen Emulation, Non-decode Emulation, IBM 468X/469X, Stand Alone Keyboard, USB (low speed and full speed)
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters on 1D; 1850 text characters for PDF417
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	7 tones or no beep
Indicators (LED)	Blue = laser on, ready to scan; yellow = auto trigger mode active White = good read

MECHANICAL

Height	198 mm (7.8")
Depth	40 mm (1.6")
Width	Handle - 45 mm (1.8"); Head - 78 mm (3.1")
Weight	149 g (5.25 oz)
Termination	10 pin modular RJ45
Cable	Standard 2.7 m (9') coiled; optional 2.1 m (7') straight


ELECTRICAL

Input Voltage	5.2 VDC $\pm$ 0.25 V
Power - Operating	1500 mW
Power - Standby	750 mW
Current - Operating	300 mA typical @ 5.25 VDC
Current - Standby	100 mA typical @ 5.25 VDC
DC Transformers	Class 2; 5.2 VDC @ 650 mA
Laser Class	CDRH: Class II; IEC 60825-1:1993+A1:1997+A2:2001
EMC	FCC, ICES-003 & EN55022 Class B

ENVIRONMENTAL

Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required

VoyagerPDF is available in the following colors



www.metrologic.com

USA
Tel. 1.800.ID.METRO
info@metrologic.com

Asia
Tel. 65.6842.7155
info@sg.metrologic.com

AOA (only)
Tel. 1.617.806.1400
info@aoa.metrologic.com

China (only)
Tel. 86.512.62572511
info@cn.metrologic.com

South America
Tel. 5511.5182.7273
info@sa.metrologic.com


Japan (only)
Tel. 81.03.3839.8511
info@jp.metrologic.com

Brazil (only)
Tel. 5511.5182.8226
info@br.metrologic.com

Europe
Tel. 49.89.89019.0
info@europe.metrologic.com




Scan Area

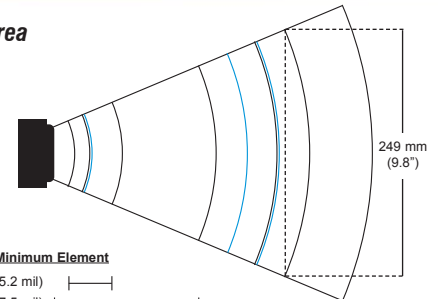


Bar Code Minimum Element




PDF417 Bar Code Minimum Element



IR Activation and Scan Width

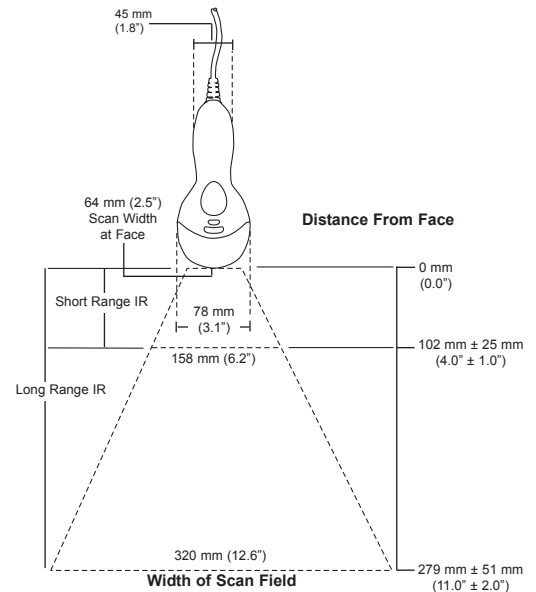

Dimensions



Specifications subject to change without notice.
Printed U.S.A., Copyright January 2003
Metrologic, All rights reserved.

